


COMPRESSION LOAD CELL

Rated load 50 tons

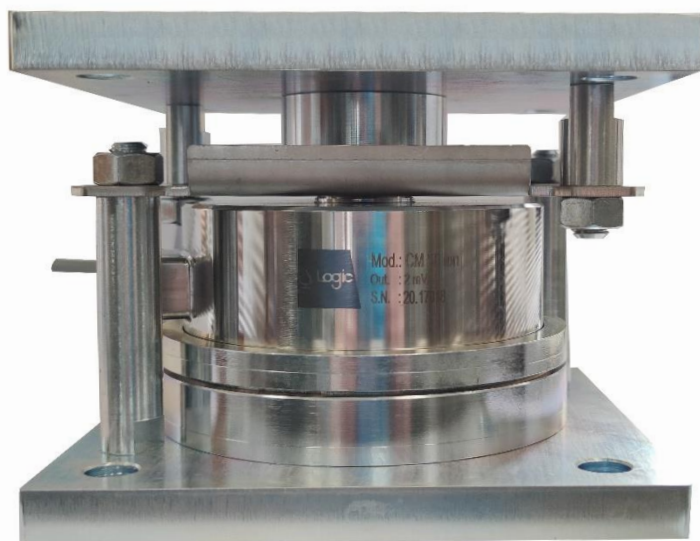

CM-50T

TECHNICAL SPECIFICATIONS

Sensitivity	mV/V	2.000±0.02
Rated Load	Tons	50
Non-linearity	%FS	±0.03
Hysteresis	%FS	±0.03
Combined error	%FS	±0.08
Repeatability	%FS	±0.015
Creep	%FS/30 min	±0.04
Zero Balance	%FS	±1
Zero Temperature Drift	%FS/5°C	±0.02
Rated Output Temperature Drift	%FS/5°C	±0.02
Input Resistance	Ω	750±25
Output Resistance	Ω	701±1
Insulation Resistance	MΩ	≥ 5.000
Supply Voltage	Vac/dc	max 15
Compensated Temperature Range	°C	-10 ÷ +40
Operating Temperature Range	°C	-20 ÷ +70
Safe Overload	%FS	150
Ultimate Load	%FS	300
Material		Stainless steel
Sealing		IP68 - Welded
Cable (Diameter/Length)		Ø 6 mm / 5m
Cable Color Code		Input: Red(+), Blue (-) Output: Yellow(+), Green (-) Sense: White (+), Black (-)



automation and engineering

27020 Travacò Siccomario
Via del Tovo 5/3 Pavia Italy

Tel. +39 0382 482657
Fax +39 0382 1850248


commerciale@logic-pavia.it
www.logic-pavia.it

COMPRESSION LOAD CELL

Rated load 50 tons



3 OR 4 LOAD CELLS ARRANGEMENT

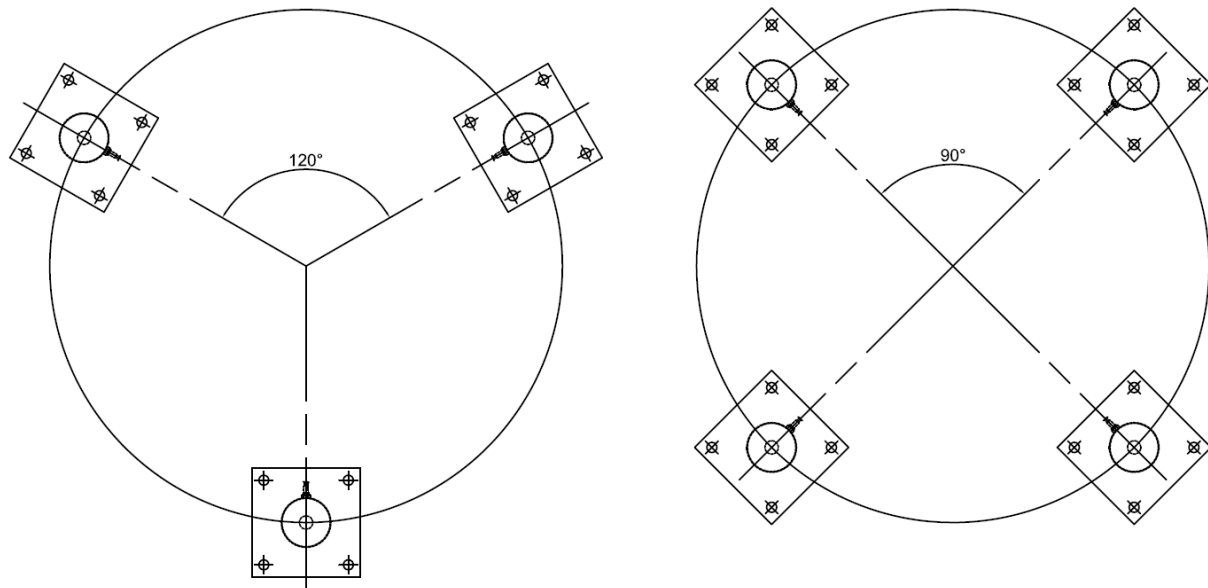

MOUNTING FOOT MOD. MK-CMP-PZ-50T

