

CELLA DI CARICO AL TAGLIO


Carico nominale 0.5-1-2 tonnellate



SKX-2T

SPECIFICHE TECNICHE

Rated capacity (FS)	Kg	500/1.000/2.000
Combined Err	%FS	±0.02
Creep (30 min)	%FS	±0.025
Zero Temperature Drift	%FS/10°C	±0.015
Rated Output Temperature Drift	%FS/10°C	±0.015
Zero Balance	%FS	±1
Accuracy Class		C3
Input Resistance	Ω	385±20
Output Resistance	Ω	350±5
Insulation Resistance	MΩ	≥ 5.000
Supply Voltage	Vac/dc	1 ÷ 15
Compensated Temperature Range	°C	-10 ÷ +40
Operating Temperature Range	°C	-20 ÷ +60
Safe Overload	%FS	150
Ultimate Load	%FS	300
Material		Stainless steel
Sealing		IP68
Cable (Diameter/Length)		Ø 5 mm / 5m
Cable Color Code		Exit: Red(+), Black (-) Sense: Yellow (+), Blue (-) Signal: Green (+), White (-)

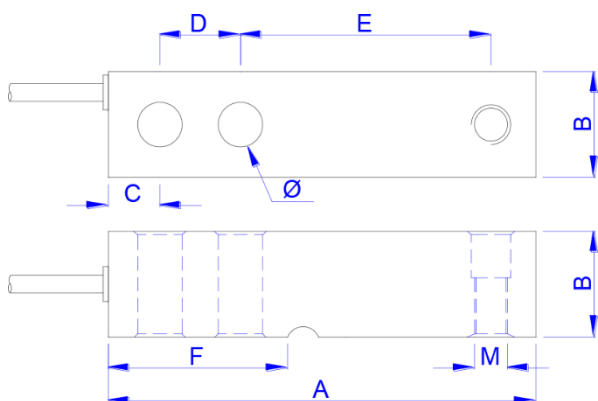



Capacity (ton)	Size mm							M- Thread
	A	B	C	D	E	F	φ	mm
0.5-1- 2	13 2	3 1	1 8	25 .4	76 .2	5 2	13	M12x1.7 5

CELLA DI CARICO AL TAGLIO

Carico nominale 0.5-1-2 tonnellate



DISPOSIZIONE A 3 O 4 CELLE DI CARICO

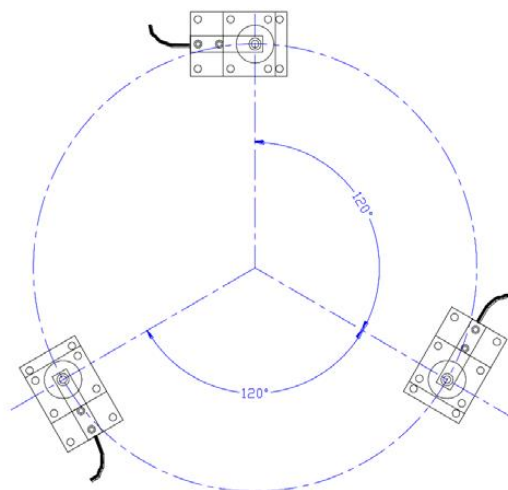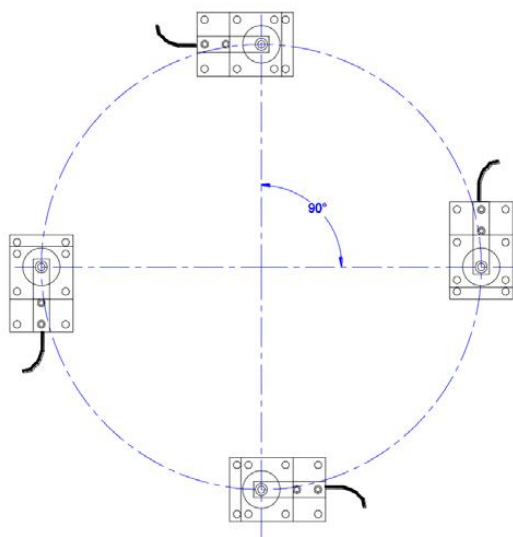

SISTEMA DI MONTAGGIO MOD. MK-SKX-2T

